


TECHNICAL SPECIFICATION

Fiber Termination Box

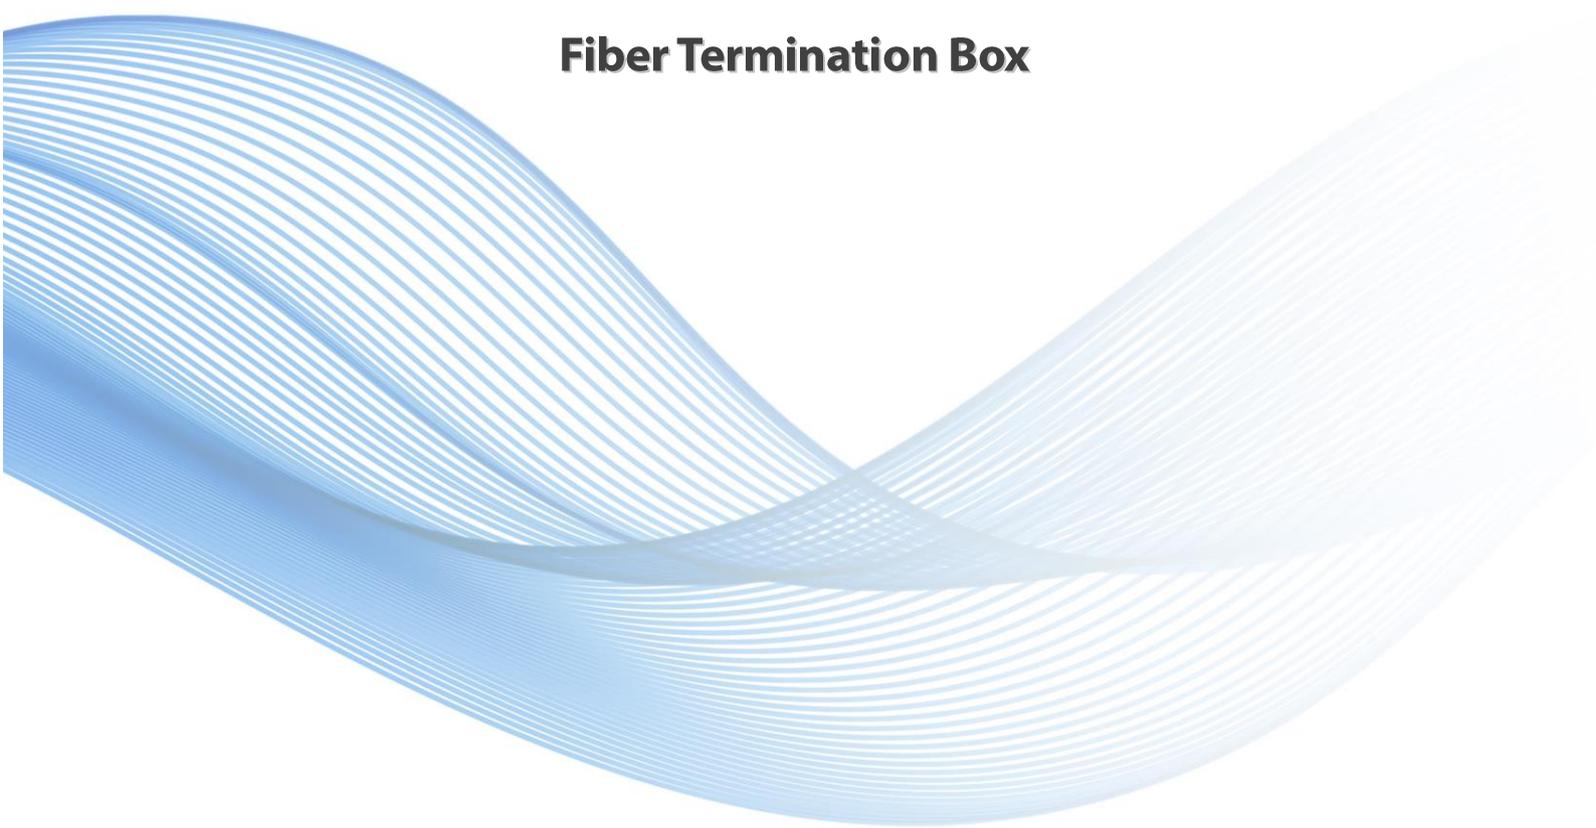

A	September 12, 2017	Derek	Jane	Felix
Version	Date	Prepared	Reviewed	Approved

1. Fiber Termination Box, GFS-2A, with 2 pcs simplex SC/UPC adapters, with tight buffer pigtail, SC/UPC, 1m, G657A1 fiber, PVC., with 2pcs heat shrink tube for splicing protection.

1.1 General properties



GFS-2A

Note: the picture provides a reference only!

1.2 Application

- For fiber's splicing, distributing and splitting.

1.3 Equipment Characteristics

- Wall mounting, suitable for both indoor and outdoor use.
- PC+ABS material, wet-proof, water-proof, dust-proof, anti-aging.
- Operation: smooth and easy wiring.
- Total enclosed structure, be in nice shape.

1.4 Specification

- Longevity: >15years.
- Insulating resistance between the metal parts of the body and grounding fitting: $\geq 1 \times 10^3 \text{M}\Omega/500\text{V}$ (DC).
- Working Temperature : $-40^\circ\text{C} \sim +85^\circ\text{C}$.
- Size: 167mm (H)*102mm (W)*31mm (D).

Note: The nominal size may vary $\pm 2\text{mm}$.

1.5 Ordering information

- Indicate the number of optic fiber cable installing.
- Indicate the number of optic fiber splicing.