

SFP28-BU27/31-40L* SFP28-BD31/27-40L*

SFP28 25Gb/s 1270nm/1310nm 40KM Transceiver

1.Features

- Compatible with CPRI option10 24.33Gbps and 25GBASE 25.78Gbps
- Up to 40km transmission on SMF
- 1270nm/1310 DML laser transmitter and APD receiver
- SFP28 MSA compliant
- Built-in digital diagnostic functions
- Single +3.3V power supply
- RoHS 6 Compliant
- Operating case temperature: Commercial : 0 to +70 °C
Industrial : -40 to +85 °C

2. Application

- 25GBASE-LR
- 24.33Gbps CPRI

3. Overview

25G SFP28 transceivers are designed for 24.33Gbps and 25.78Gbps data rate over SMF and support up to 40km link length. They are compliant to IEEE802.3ba, SFF-8402, SFF-8432. Digital diagnostic monitoring interface compliant to SFF-8472 is available via an I2C interface.

4.Order Information

Part No.	Data Rate	Laser	Fiber Type	Distance	Optical Interface	Temp	DDM
SFP28-BU27/31-40L	25.78Gbps	1270nm/ 1310nm	SMF	40km	LC	0~70°C	Y
SFP28-BD31/27-40L	25.78Gbps	1310nm/ 1270nm	SMF	40km	LC	0~70°C	Y
SFP28-BU27/31-40LI	25.78Gbps	1270nm/ 1310nm	SMF	40km	LC	-40~85°C	Y
SFP28-BD31/27-40LI	25.78Gbps	1310nm/ 1270nm	SMF	40km	LC	-40~85°C	Y

5. Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Storage Temperature	T _S	-40	-	+85	°C	
Supply Voltage	V _{CC}	-0.5	-	+4.0	V	
Operating Relative Humidity	RH	-	-	+95	%	

6. Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Operating Case Temperature	T _C	-40	-	+85	°C	
Operating Case Temperature	T _C	0	-	+70	°C	Commercial
		-40	-	+85	°C	Industrial
Power Supply Voltage	V _{CC}	3.135	3.3	3.465	V	
Power Supply Current	I _{CC}	-	-	650	mA	
Maximum Power Dissipation	P _D	-	-	2.2	W	
Bit Rate	BR	24.3	25.78	26.5	Gb/s	
Transmission Distance	TD		-	40	km	Over SMF

7. Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Transmitter						
Center Wavelength	λ_t	1260	1270	1280	nm	
		1310	1310	1320	nm	
Average Optical Power, 25GE	P _{avg}	-1	-	5	dBm	
Optical Modulation Amplitude, 25GE	OMA	-2	-	-	dBm	
OMA-TDP, 25GE	OMA_TDP	-5	-	-	dBm	
Average Output Power (Laser Turn off)	P _{OFF}	-	-	-30	dBm	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
Extinction Ratio, 25GE	ER	3.5	-	-	dB	
Transmitter and Dispersion Penalty	TDP	-	-	2.7	dB	
Optical Return Loss Tolerance	ORLT	-	-	11	dB	
Receiver						
Center Wavelength	λ_r	1260	1270	1280	nm	
		1300	1310	1320	nm	
Average Rx Sensitivity, 25GE@5E-5	P _{SEN}	-	-	-18	dBm	1
Receiver Overload	P _{IN-OL}	-5	-	-	dBm	
Reflectance	Ref	-	-	-26	dB	
LOS Assert	LOS _A	-35	-	-	dBm	
LOS De-assert	LOS _D	-	-	-19	dBm	
LOS Hysteresis	LOS _H	0.5	-	-	dB	


Notes:

1. Measured with a PRBS 2³¹-1 test pattern @25.78125 Gb/s.

8. Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Transmitter (Module Input)						
Differential Data Input Amplitude	$V_{IN,P-P}$	200	-	900	mVpp	
Differential Input Impedance	R_{in}	-	100	-	Ω	
Tx_Fault	Normal Operation	V_{IL}	-0.3	-	0.4	V
	Tx Fault	V_{IH}	2.4	-	$V_{CC}+0.3$	V
Tx_Disable	Normal Operation	V_{IL}	-0.3	-	0.8	V
	Laser Disable	V_{IH}	2.0	-	$V_{CC}+0.3$	V
Receiver (Module Output)						
Differential Data Output Amplitude	$V_{OUT,P-P}$	300	-	900	mVpp	
Differential Output Impedance	R_{out}	-	100	-	Ω	
Differential Termination Mismatch		-	-	± 5	%	
Output Rise/Fall Time, 20%~80%	T_R	9.5	-	-	ps	
Rx_LOS	Normal Operation	V_{OL}	-0.3	-	0.4	V
	Lose Signal	V_{OH}	2.4	-	$V_{CC}+0.3$	V

9. Pin Definition

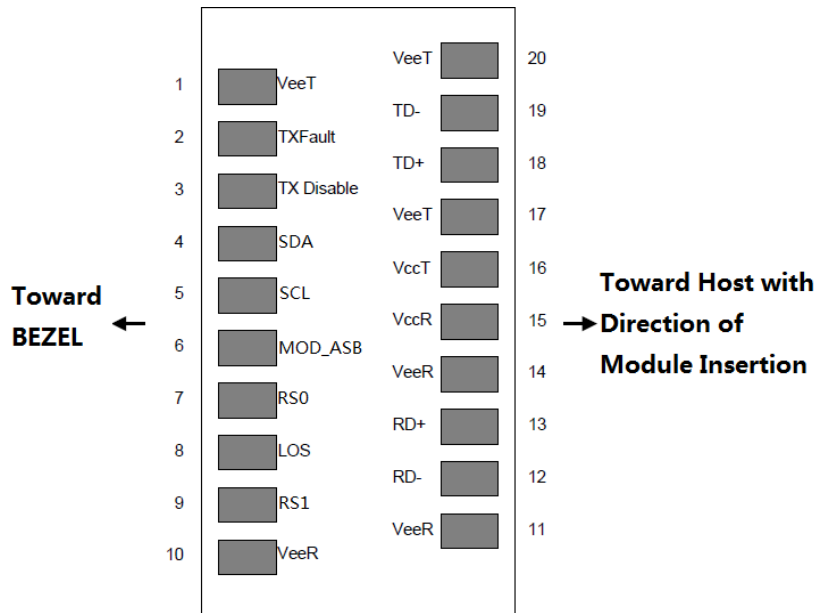



Pin	Symbol	Name/Description	Notes
1	VeeT	Transmitter Ground	1
2	Tx_Fault	Transmitter Fault - High indicates a fault condition	2
3	Tx_Disable	Transmitter Disable – High or open disables the transmitter	
4	SDA	2-wire Serial Interface Data Line (MOD-DEF2)	3
5	SCL	2-wire Serial Interface Clock (MOD-DEF1)	3
6	MOD_ABS	Module Absent, connected to VeeT or VeeR in the module	
7	RS0	Rate Select 0 – Not used, Presents high input impedance	5
8	RX_LOS	Receiver Loss of Signal(LVTTL-O). Logic 0 indicates normal operation	4
9	RS1	Rate Select 1 – Not used, Presents high input impedance	5
10	VeeR	Receiver Ground	1
11	VeeR	Receiver Ground	1
12	RD-	Inverse Received Data out (CML-O), AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	VeeR	Receiver Ground	1
15	VccR	Receiver Power Supply	
16	VccT	Transmitter Power Supply	
17	VeeT	Transmitter Ground	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VeeT	Transmitter Ground	1

Notes:

1. Module ground pins GND are isolated from the module case.
2. Tx_Fault is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on Host board.
3. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V.
4. LOS is open collector output. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V.
5. RS0 and RS1 pins are pulled low to GND with a resistor > 30KΩ in module.

10.Digital Diagnostics

Parameter	Range	Accuracy	Unit	Calibration
Temperature	-40 to 85	±5	°C	Internal
Voltage	3.15 to 3.45	±5%	V	Internal
Tx Bias Current Per Lane	10 to 100	±10%	mA	Internal
Tx Output Power Per Lane	-3 to +5	±3	dBm	Internal
Rx Power (Each Lane)	-18 to -8	±3	dBm	Internal

11. Outline Dimensions (mm)

